

**NEW**

IT-5 INSULATOR TESTER

QUICK, CONFIDENT AND RELIABLE VERIFICATION WITH
SIMPLE VISUAL AND AUDIBLE FEEDBACK

DESIGNED FOR UTILITY LINE WORK


The IT-5 Insulator Tester gives crews a fast, straightforward way to evaluate insulator condition in the field. It detects internal dielectric failures in porcelain and glass suspension insulators and identifies surface contamination on all insulator types—including porcelain, ceramic, glass, and polymer/composite.

FEATURES

- Faster go/no-go decisions
- Built to handle daily field use
- Simple to learn and use
- Rechargeable for minimal downtime



NEW **IT-5 INSULATOR TESTER**
FAST, CONFIDENT INSULATOR VERIFICATION

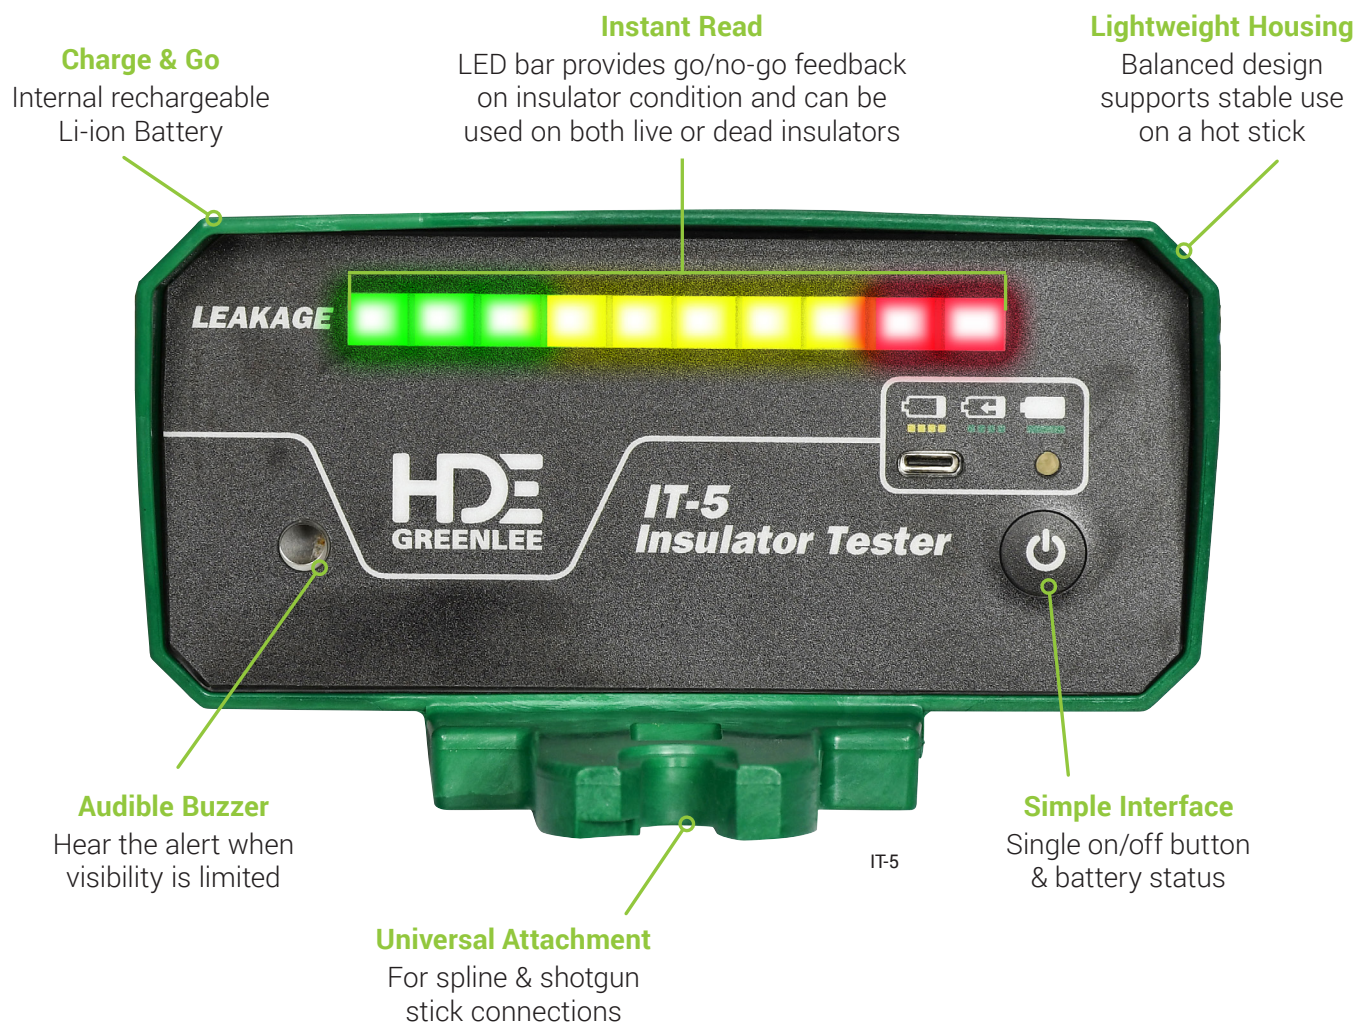

SPECIFICATIONS

Dimensions	11.2 in. X 3.4 in. X 6.2 in. (284 mm × 86 mm × 157 mm)
Weight	2.5 lb. (1.13 kg)
Max Output Voltage	10kVDC
Maximum Output Current	85µA
Audible Sound Level	103 dB @ 10 cm
Operating Temperature	-4°F to 125°F (-20°C to 52°C)
Enclosure Material	Nylon UL 94-V0
Printed Circuit Board	FR-4 UL 94-V0
Max Altitude	6,566 ft. (2000 M)

IT-5 INSULATOR TESTER

CAT NO.	DESCRIPTION
IT-5	IT-5 Insulator Tester

INCLUDED ACCESSORIES

CAT NO.	DESCRIPTION
025-02035-SUB	Bent Test Probe
025-02040-SUB	Straight Test Probe

